

NOWAX

KIWI

A
FRESH
FUTURE
FOR YOU



MEMBER OF
NB
GROUP
COMPANIES

KIWI



Bottle Cooler with Frameless Design and Large Internal Volume for Maximum Benefit.

Refridisseur avec un Design sans Cadre et un Grand Volume Interne pour un Maximum de Bénéfices.

+1 / +10 °C



MODEL	KIWI SLIM	KIWI 630 SINGLE DOOR	KIWI 1270 DOUBLE DOOR	KIWI XL 1620 DOUBLE DOOR	KIWI XL 1620 3 D
TEMPERATURE RANGE Plage de Température	+1 °C / +10 °C	+1 °C / +10 °C	+1 °C / +10 °C	+1 °C / +10 °C	+1 °C / +10 °C
INTERNAL DIMENSIONS (WxDxH) mm Dimensions Interne (LxPxH) mm	369 x 560 x 1594	544 x 638 x 1594	1184 x 638 x 1594	1534 x 638 x 1594	1534 x 638 x 1594
EXTERNAL DIMENSIONS (WxDxH) mm Dimensions Externe (LxPxH) mm	455 x 698 x 2065	630 x 740 x 2077	1270 x 740 x 2077	1620 x 740 x 2077	1620 x 740 x 2077
PACKED DIMENSIONS (WxDxH) mm Dimensions Emballées (LxPxH) mm	470 x 725 x 2175	640 x 765 x 2167	1280 x 765 x 2167	1630 x 765 x 2167	1630 x 765 x 2167
NET CAPACITY (LT) CLASS 4 Contenance Nette (Lt.) Classe 4	306 Lt	510 Lt	1095 Lt	1430 Lt	1430 Lt
GROSS CAPACITY (LT) CLASS 4 Contenance Brute (Lt.) Classe 4	330 Lt	558 Lt	1215 Lt	1574 Lt	1574 Lt
FOOTPRINT AREA Surface Projection	0,31 m²	0,46 m²	0,93 m²	1,20 m²	1,20 m²
SHELVE QUANTITY Quantité d'étagère	5	5	5	10	15
REFRIGERANT GAS Gaz Réfrigérant	R404 / R290 / R 600	R404 / R290	R404 / R290	R404 / R290	R404 / R290
CLIMATE CLASS Classe Climatique	A COND. (25°C° / %60 RH)	A COND. (25°C° / %60 RH)	A COND. (25°C° / %60 RH)	A COND. (25°C° / %60 RH)	A COND. (25°C° / %60 RH)
VOLTAGE / FREQUENCY Tension/Fréquence	220 V / 50 Hz.	220 V / 50 Hz.	220 V / 50 Hz.	220 V / 50 Hz.	220 V / 50 Hz.
THERMOSTAT Thermostat	DIGITAL	DIGITAL	DIGITAL	DIGITAL	DIGITAL
ADJUSTABLE LEG Pied Réglable	4x ROLLER	4x ROLLER & 2 ADJUSTABLE LEGS 4x Roller & 2 Pieds Réglable	2x ROLLER & 2 ADJUSTABLE LEGS 2x Roller & 2 Pieds Réglable	6x ROLLER & 3 ADJUSTABLE LEGS 6x Roller & 3 Pieds Réglable	6x ROLLER & 3 ADJUSTABLE LEGS 6x Roller & 3 Pieds Réglable
INTERNAL LIGHTENING Éclairage Interne	LED	LED	LED	LED	LED
INSULATION MATERIAL Matière Isolant	Polyurethane Polyuréthane	Polyurethane Polyuréthane	Polyurethane Polyuréthane	Polyurethane Polyuréthane	Polyurethane Polyuréthane
PU THICKNESS (mm) Épaisseur PU	43 mm	43 mm	43 mm	43 mm	43 mm
DOOR QUANTITY / DIMENSIONS Quantité de Porte / Dimension	1 / 450mm	1 / 620 x 1736 mm	2 / 620 x 1736 mm	2 / 800 x 1736 mm	3 / 525 x 1736 mm
DOOR FRAME Cadre du Porte	ALUMINIUM FRAME - FRAMELESS LOW E TEMPERED DOUBLE GLASS SELF CLOSING DOOR Cadre Aluminium - Porte Sans Cadre Self-closing Avec Vitre Double Tempéré Low-E				
20" / 40" / 40" HC CONTAINER QUANTITIES Quantité par Container 20" / 40" / 40" HC	40 / 80 / 80	27 / 54 / 54	13 / 27 / 27	10 / 21 / 21	10 / 21 / 21

OPTIONS	KIWI SLIM / KIWI 630 SINGLE DOOR / KIWI 1270 DOUBLE DOOR / KIWI 1620 DOUBLE DOOR / KIWI 1620 3 D Lightening From Door / Hydrocarbon Gas / Fan On/Off Switch / Inclined Shelves / Colored - Inox External Body / Night Cover / Price Label Stock & Sticker / Branding Application / Door Lock / Wheels / C Condition Option Éclairage du Porte / Gaz Hydrocarbon / Bouton Fan On/Off / Étagère Inclignée / Cabine Coloré - Aspect Inox / Couvert de Nuit / Étiquettes de Prix / Application de Marque & Sticker / Verrou de Porte / Roues / C Condition Option
----------------	--


KIWI SLIM




KIWI 630 SINGLE DOOR




KIWI XL 1620 DOUBLE DOOR

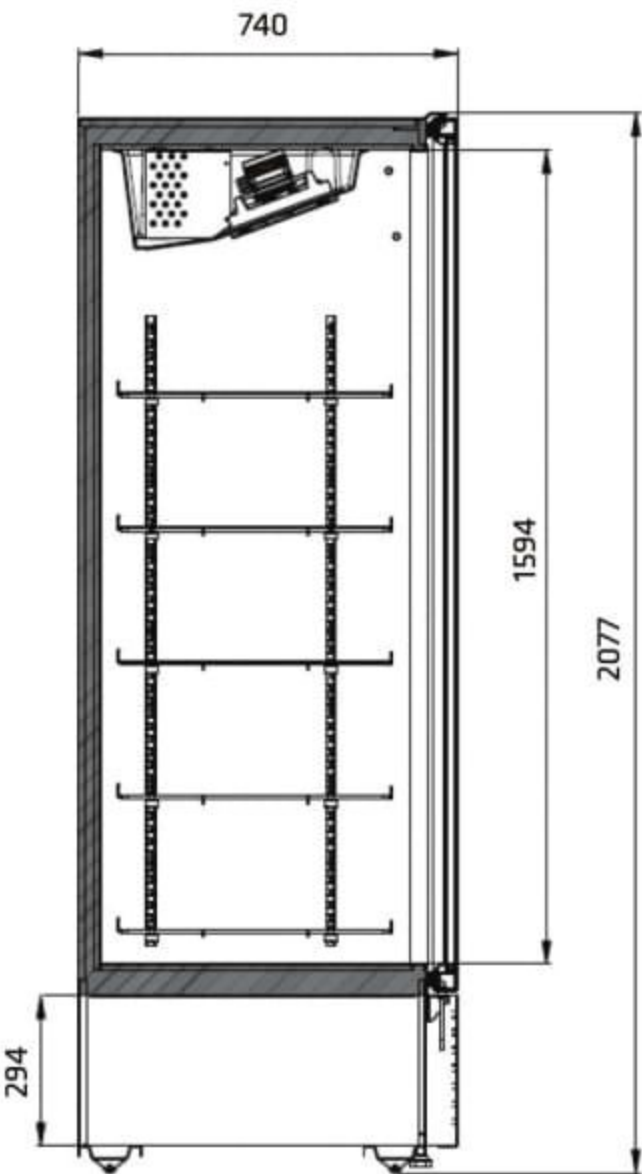

KIWI 1270 DOUBLE DOOR

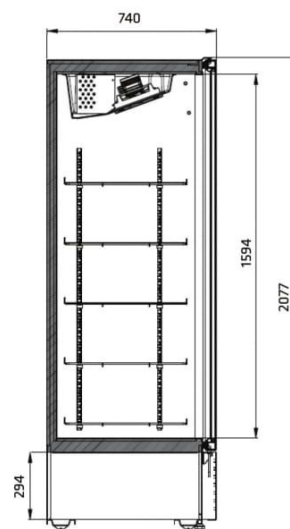

KIWI XL 1620 3 D

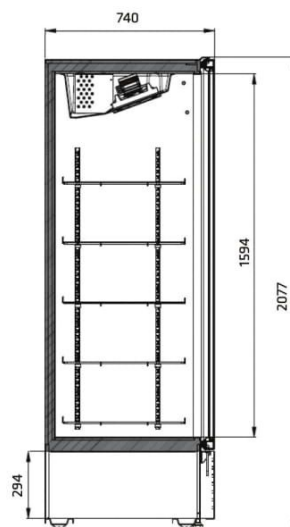

NOWAX

www.nowax.com.tr

Genel Merkez

Adres: Barbaros Mah. Akzambak Sk. No:3 Uphill Towers A1 Apt. A Blok D/132 Ataşehir / İSTANBUL

Telefon: 0216 688 05 88

E-Mail: info@nowax.com.tr

Konya İç Anadolu ve Akdeniz Bölgesi

Adres: Fevzi Çakmak Mahallesi Aslım Caddesi Kobisan Sanayi Sitesi 69/E Karatay/KONYA

Telefon: 0332 503 0588

E-mail: konya@nowax.com.tr



nowaxofficialtr